




STYLE 2

Ref : A-Type galvanised

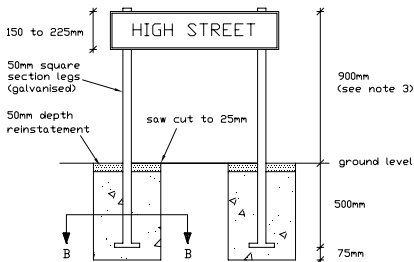

SECTION B-B



For cul-de-sacs and no through roads, 'T' to diagram 816.1 to be added.

STREET NAMEPLATE SPECIFICATION

- Street nameplates to be erected on both sides of each road
- Street nameplates to be manufactured from 115g SIC half hard (99% pure) aluminium.
- Text to be die pressed black lettering in 90mm Kindersley with a 12.5mm black bead on a white background.

NOTES:

- Reinstatement material C30 concrete to be used in concrete / flag surfacing. Cold lay bitmac in bituminous materials.
- On Engineers instruction only, if nameplate is to be shortened, lugs on base are to be refixed.
- Installation height may vary due to local conditions, seek advice where necessary.

TENDRING DISTRICT COUNCIL
TOWN HALL
CLAFTON-ON-SEA
ESSEX
CO15 1SE

T.MacKinlay M.Sc., F.C.I.H., D.M.S., M.C.I.E.H.
HEAD OF TECHNICAL
& PROCUREMENT SERVICES

Client: TENDRING DISTRICT COUNCIL

Job Title:
STREET NAMEPLATE SPECIFICATION

Drawing Title:
TYPICAL DETAILS

Scale: 1:20

Drawn By: JDS

Date: October 2000

Checked By:

Project No:

Drawing No:
E/H/4431

Revision: